

## Instructions for Side Door Enclosure Mounted with JStrong Half Doors

### **Parts List:**

- 2- 8' pcs of Velcro
- 2-23" Plastic J Groove mounting strips
- 2- 4" Plastic J Groove mounting strips
- 16- #7x7/16 mounting screws
- 2- door enclosure panels

### **Tools Needed:**

- 1-Phillips head Screwdriver
- 1-pair of scissors



**Toll Free 1-877-444-4147**

**[www.Jstrongindustries.com](http://www.Jstrongindustries.com)**

### **Installation Instructions:**

#### **Step 1:**

Mount 23" J-strip with 6-#7 x 7/16 screws under 2" lip of J Strong door.  
(fig 1)

#### **Step 2**

Mount 4" J-strip with 2 #7 x 7/16 screws under wise in front of Jstrong door  
(fig 2)

#### **Step 3:**

Slide corresponding 23" J-strip on the bottom of the side enclosure into J-strip you just mounted to the Jstrong door. Repeat this step for the 4" J-strip.  
(fig 3)

#### **Step 4:**

Attach all straps thru their hooks and fasten around rollover protection system (black tubing). Aligning door as smooth as possible. (fig 4)

#### **Step 5:**

Starting from the bottom of the enclosure unattach the bottom right hand strap, cut a strip of Velcro and attach it to the rollover protection system (black tubular bars), reattach the strap. Make sure to pull the side enclosure in an upward motion toward the top of the roll cage when attaching the Velcro to ensure a tight smooth fit. Next do the left hand bottom strap and continue this process for each strap until Velcro has secured the enclosure to your Rhino's rollover protection system. The rear of door will match and attach to Velcro on the rear dust guard. If not using rear dust guard, you will need to apply Velcro to rear section of roll cage along center facing you.

#### **Step 6:**

Install additional Velcro as needed across the bottom of the rear panel.

### **Repeat all 6 steps for the other doors side enclosure**

\*Remove rear dust guard and zip out windows completely prior to transporting on highways were speeds may exceed 55 mph

\*Your new rear dust guard and side enclosure is made of the highest quality clear flexible acrylic. It will, however; scratch if not handled correctly.

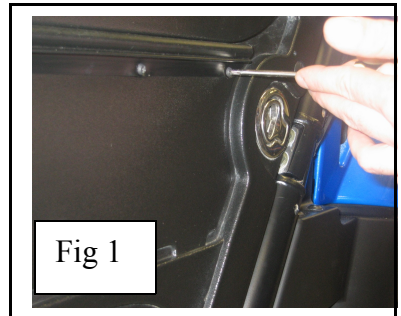


Fig 1

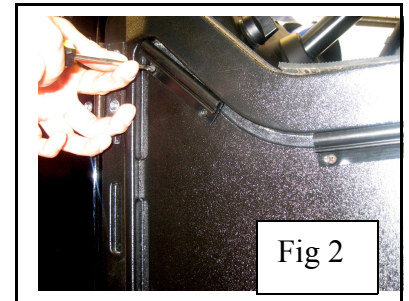


Fig 2

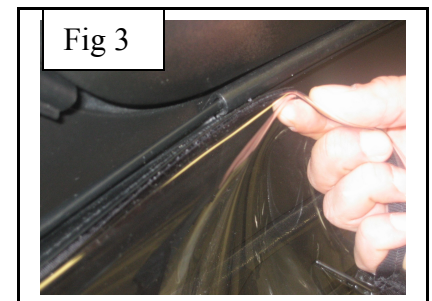


Fig 3



Fig 4

### **Note:**

**Jstrong side enclosure is designed to work exclusively with Jstrong half doors.**

**\*\* We recommend that you check parts received against parts list. Also test fit door enclosure by mounting door on Rhino by using the 5 top mounting straps and then pull door down and side to side to get a look at how it will mount.**